


CBP1-381



Made in Taiwan

Electrical Rating	10A 300VAC
Housing Material	Polyamide 66, Green
Contact	Phosphor Bronze, 0.3t, Nickel Plated
Screw	M2.0, Steel, Zinc Plated
Cage clamp	Brass, 0.7t, Nickel Plated
Solder Pin	0.8mm Brass, Tin Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	26~16 AWG
Max. Torque Value	3kg/cm
Number of Poles	2P~16P
Pitch (terminal to terminal)	3.81mm


Unit : mm

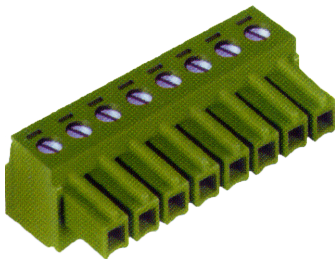


CBP1-381K

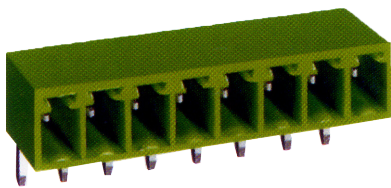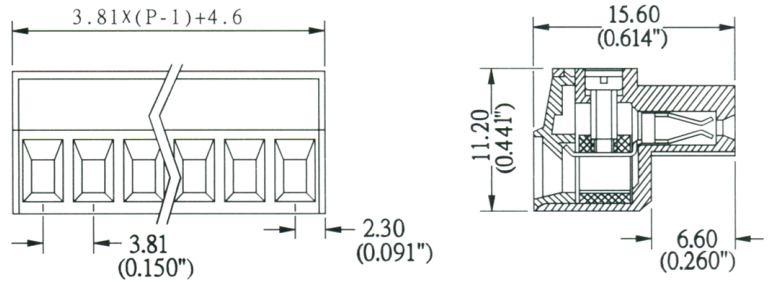


CBP1-381R

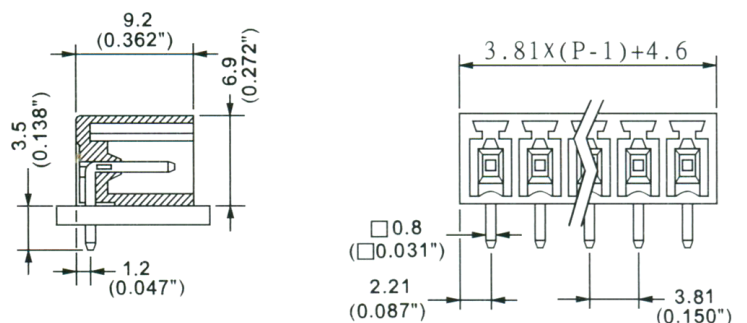


Unit : mm

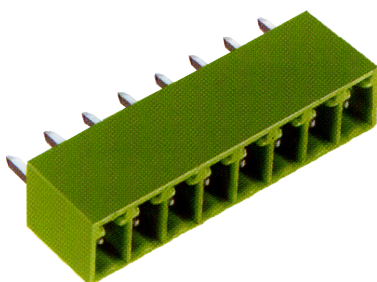


CBP1-381V




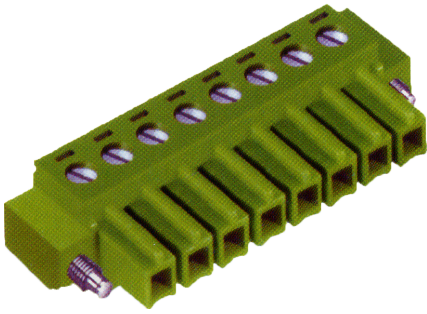


CBP1-381AK

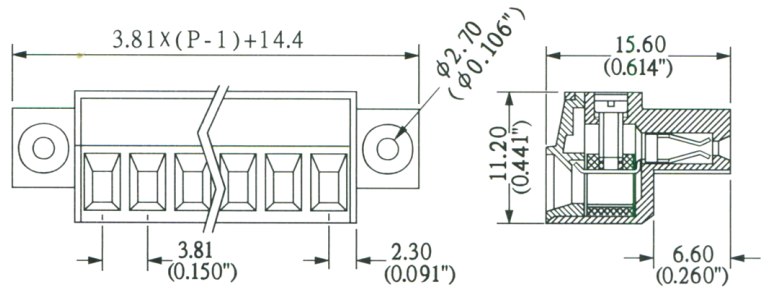


Unit : mm

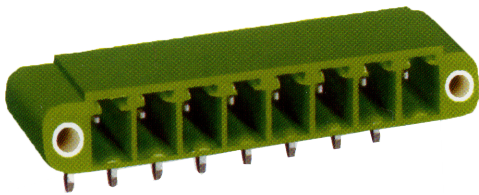


CBP1-381AR

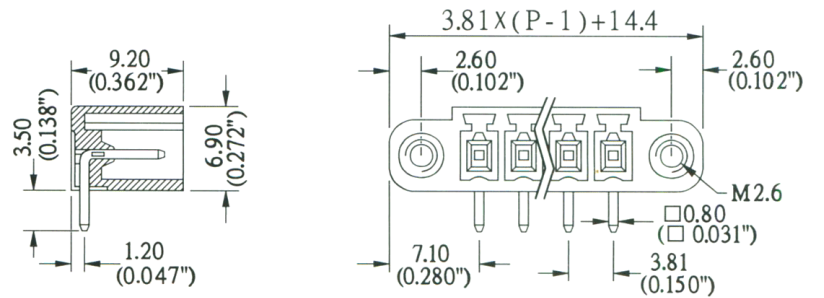

Unit : mm

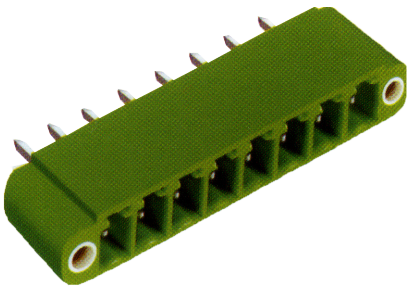

CBP1-381AV

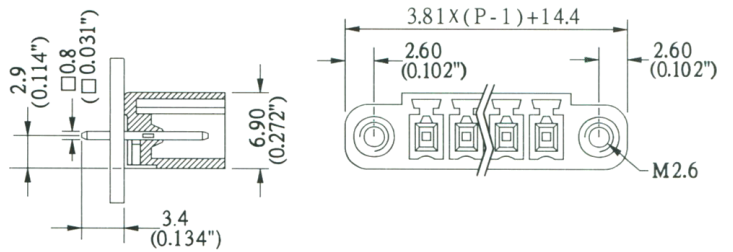

Unit : mm